

SECOND INSPECTION FORM (6 MONTHS)

DATE

| ITEM | RESULT | CORRECTION | COST |
|--------------------------|--------|------------|------|
| FRAME AND LATCH | | | |
| STEERING SYSTEM | | | |
| HANDLEBAR SYSTEM | | | |
| SADDLE, SEAT POST SYSTEM | | | |
| DRIVE SYSTEM | | | |
| WHEEL SYSTEM | | | |
| BRAKE SYSTEM | | | |
| CASTER WHEEL SYSTEM | | | |
| LAMP AND REFLECTORS | | | |

DEALERSHIP'S NAME:
 COMPANY REGISTRATION NO:
 DEALER'S SIGNATURE:

TOTAL COST:

THIRD INSPECTION FORM (1 YEAR)

DATE

| ITEM | RESULT | CORRECTION | COST |
|--------------------------|--------|------------|------|
| FRAME AND LATCH | | | |
| STEERING SYSTEM | | | |
| HANDLEBAR SYSTEM | | | |
| SADDLE, SEAT POST SYSTEM | | | |
| DRIVE SYSTEM | | | |
| WHEEL SYSTEM | | | |
| BRAKE SYSTEM | | | |
| CASTER WHEEL SYSTEM | | | |
| LAMP AND REFLECTORS | | | |

DEALERSHIP'S NAME:
 COMPANY REGISTRATION NO:
 DEALER'S SIGNATURE:

TOTAL COST:

5.2 Cleaning and Care

Because of the great deal of contact between you and your bike, your clothing and hands are likely to get soiled if the bike is coated with oil and dirt. To prevent this from happening, carefully clean the bike of dirt and oil deposits. The use of solvents and other cleaners will help dislodge dirt and oil. Use a soft rag and a toothbrush to thoroughly clean all parts of the bike. After you ride through particularly dirty and dusty areas or a rainstorm, the chain should be given special attention. If you own a chain breaker tool, the chain can be removed entirely for cleaning. To keep your bicycle looking brand new and to keep dirt from adhering, it is recommended that you use a high quality car wax on your bicycle.

To keep your bike running smoothly, it is necessary to lubricate all the moving parts. Thoroughly clean the parts to be lubricated, and remove all foreign particles. Light oil of SAE 20 consistency can be used as a lubricant for most parts. Frequency of lubrication depends on the amount of use and weather encountered.


Warning: Do not use gasoline for cleaning. Avoid fumes and clean out of doors if possible.

Caution: Do not allow any solvent or oil to get on the wheels or caster wheel; if you do, clean immediately.

6. ASSEMBLY, ADJUSTMENT AND TROUBLE SHOOTING

6.1 Tools

You DAHON Folder is shipped completely assembled and with air in the tires. Brakes and gear shift should be already adjusted. Your dealer should check each point in the safety list, but you will wish to have some tools for subsequent adjustment and safety checks (a minimum shown below).

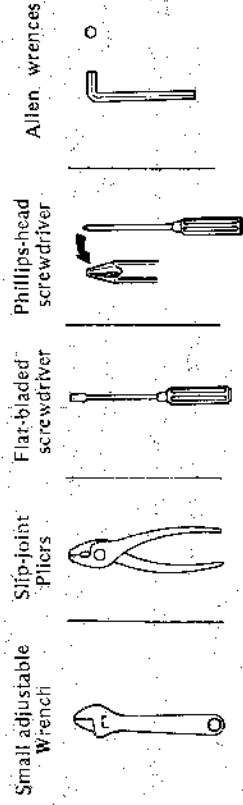

(Jaws must open at least 9/16")